


## STRIP-90 Flexible LED Strip



### Description

Introducing STRIP-90 LED strip lighting system. STRIP-90 offers new possibilities in the way we illuminate areas and surfaces. The secret lies in its thin and flexible PCB which allows for long and linear lengths to be preformed with ease. With added advantages of low wattage and uniform lighting the STRIP-90 opens the area for many design concepts to become reality.

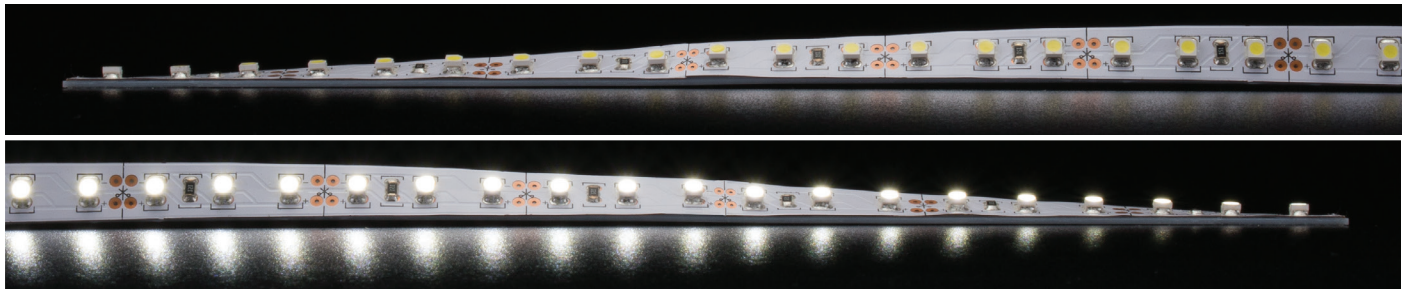

### Specification Features

Colours:	3 colour options available
Light Source:	3528 SMD LED
LED Type:	Epistar (Taiwan)
Colour Temperature (K):	3200K, 4000K, 6500K
Colour Redering Index:	≥83
Number of LED per mtr:	90
Wattage Per MTR (W):	7.2W
Input Voltage (VDC):	12VDC
Beam angle (°):	120°
Wiring:	Parallel
IP Rating:	IP20
Cutting Increments/Sections:	33mm (group of 3 LED)
Requires:	12VDC constant voltage driver
Dimmable:	Yes* DALI, 0-10V, DMX-512, RF
IES files:	Yes**
Mounting:	Optional aluminium mounting profile***

\* For dimming options please refer to the controller section for further details.  
 \*\* Available upon request.  
 \*\*\* Mounting profile optional (not required).

### Order Info



Colour Temp: 6500K  
 Order Code: 20016  
 Product Code: STRIP-90-65K  
 Lumens/m: 655 lm/m



Colour Temp: 4000K  
 Order Code: 20007  
 Product Code: STRIP-90-40K  
 Lumens/m: 642 lm/m



Colour Temp: 3200K  
 Order Code: 20017  
 Product Code: STRIP-90-32K  
 Lumens/m: 603 lm/m

### Diagrams / Additional

