

I-WAVE-6 LED Exterior Wall Light



Description


2x3W LED Slimline exterior wall light narrow light up and wide light down. Die cast aluminium body, custom powder coat. 25° up-beam and 60° down-beam. 240V wiring, built in 350mA LED Driver. Non-dimmable.



Specification Features

Input Voltage: 240V AC
 Power (W): 6W - (2x3W)
 IP rating (IP): IP65
 Lumens (lm): Warm White 3000K - 320lm
 White 5000K - 360lm
 LED type: High Power LED Emitter with 20mm star PCB
 CCT: 3000K - 5000K
 CRI: ≥85
 Beam angle (°): 25° up & 60° down
 Dimmable: No
 Lifespan (hrs): 50,000hrs

Diagrams / Additional

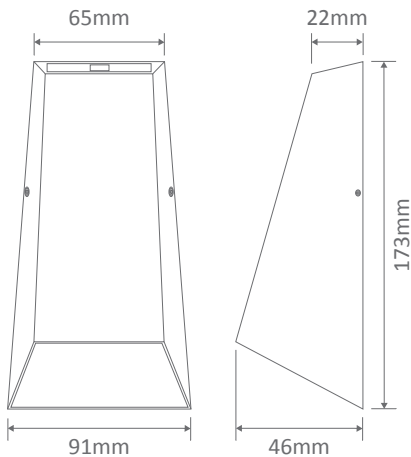

Item No.	Variant	Colour
IWAVE-6-BLK	19566	3000K
	19567	5000K
IWAVE-6-DGR	19574	3000K
	19575	5000K
IWAVE-6-SLR	19460	3000K
	19461	5000K
IWAVE-6-WHT	19616	3000K
	19617	5000K