



## Max-75-REC

### 1M LED Recessed Profile

#### Description

The Max-75 Recessed profile is designed to suit commercial and residential applications, this profile system incorporates an extruded aluminium body with flat PMMA diffuser, and Osram Led boards. The system offers many additional options such as Dali dimming and emergency upon request.

#### Specification Features

Input Voltage:	240V
Power (W):	17.3W/Per Metre
IP rating (IP):	20
Lumens (lm):	Warm White 3000K - 2466lm
LED type:	Neutral White 4000K - 2600lm
CCT:	White 5000K - 2600lm
CRI:	Extra White 6500K - 2600lm
Beam angle (°):	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs
Installation:	Recessed
Material:	Extruded 6063 aluminium
Finish:	Clear anodised, black or white powder coat finish
Diffuser:	Flat high output opal-frost
Length:	Sold per metre*
Size (mm)	Profile (W) 75mm x (H) 75mm
Available Upon Request:	<ul style="list-style-type: none"> <li>• High Output LED Boards</li> <li>• Intergrated Emergency</li> </ul>

*Note: This product is made to order and may have a lead time.*

\* Profile can be cut to any length required.


\*\* Dali and 0-10V dimming available upon request



Aluminium Finish




White Finish



Back View

#### Diagrams / Additional

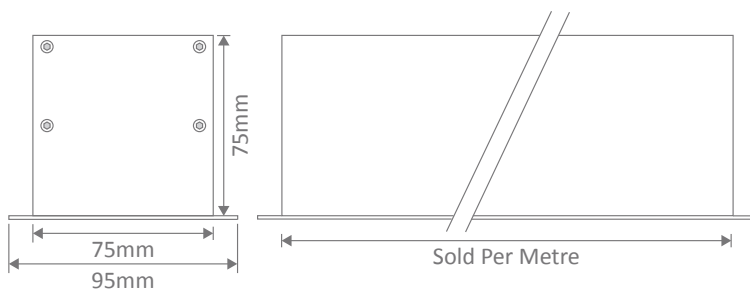

Item No.	Variant	Colour
Max-75-REC Recessed (BLK)	22352	3000K
	22353	4000K
	22354	5000K
	22355	6500K

Item No.	Variant	Colour
Max-75-REC Recessed (ALU)	22348	3000K
	22349	4000K
	22350	5000K
	22351	6500K

Item No.	Variant	Colour
Max-75-REC Recessed (WHT)	22356	3000K
	22357	4000K
	22358	5000K
	22359	6500K