




LINK SERIES


LED SLIM LINKABLE LIGHTS

LINK1-8

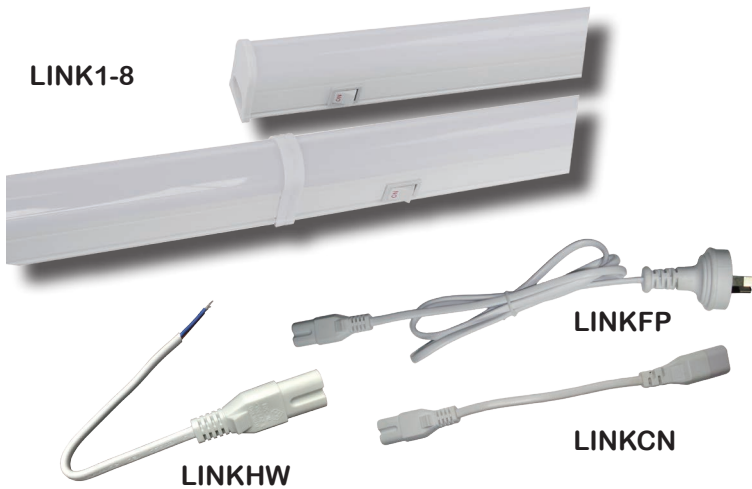

PRODUCT FEATURES

- Input voltage: 240V AC
- Wattage: 4W, 8W, 12W & 15W
- SMD2835 LED chips
- Polycarbonate
- Life time: 30,000hrs
- Ambient temperature: -20 to 40 DEG
- Comes with end cap and mounting brackets
- Not suitable for dimming
- IP20 for indoor use
- Flex & plug and connecting cables sold separately
- Carton QTY: 1/25
- 3 year replacement warranty

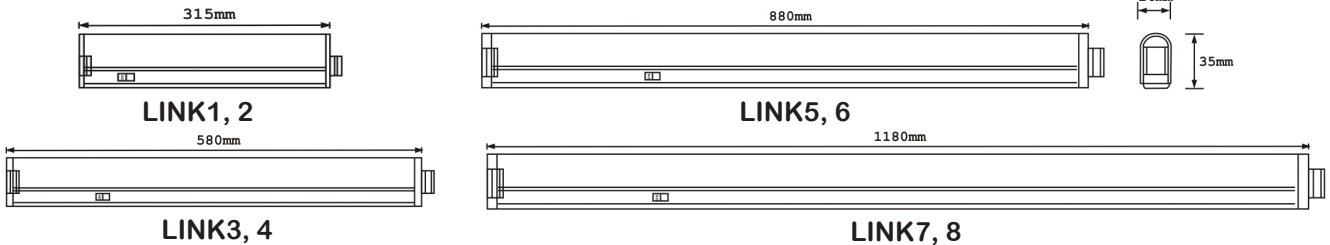

CODE	DESCRIPTION	KELVIN	LUMENS	WATT	CRI	BEAM	DIMENSIONS
LINK2	4W SLIM LINKABLE LIGHT 5000K	5000K	350LM	4	70	120°	315x26x35mm
LINK3	8W SLIM LINKABLE LIGHT 3000K	3000K	600LM	8	70	120°	580x26x35mm
LINK1A	4W SLIM LINKABLE LIGHT 3000K	3000K	300LM	4	80	120°	315x26x35mm
LINK2A	4W SLIM LINKABLE LIGHT 5000K	5000K	314LM	4	80	120°	315x26x35mm
LINK3A	8W SLIM LINKABLE LIGHT 3000K	3000K	600LM	8	80	120°	580x26x35mm
LINK4A	8W SLIM LINKABLE LIGHT 5000K	5000K	650LM	8	80	120°	580x26x35mm
LINK5A	12W SLIM LINKABLE LIGHT 3000K	3000K	900LM	12	80	120°	880x26x35mm
LINK6A	12W SLIM LINKABLE LIGHT 5000K	5000K	1000LM	12	80	120°	880x26x35mm
LINK7A	15W SLIM LINKABLE LIGHT 3000K	3000K	1200LM	15	80	120°	1180x26x35mm
LINK8A	15W SLIM LINKABLE LIGHT 5000K	5000K	1300LM	15	80	120°	1180x26x35mm
LINKCN	22cm CONNECTING CABLE FOR LINK1-8 (SOLD SEPARATELY)						
LINKFP	FLEX & PLUG 2 PIN 1.2m CABLE FOR LINK1-8 (SOLD SEPARATELY)						
LINKHW	HARD WIRE LEAD 20cm FOR LINK1-8 (SOLD SEPARATELY)						
LINKMB	LINKABLE MOUNTING BRACKET WITH SCREW (SOLD SEPARATELY)						

Note: All linkable models can be used together. Maximum connections 150W.

UPDATED ON 29/11/2016