



Replacement  
Warranty\*

**20W TRICOLOUR LED WEATHERPROOF BATTEN LIGHT**

TLWB34618



**ENERGY EFFICIENT TUBELESS DESIGN**

This Tricolour LED weatherproof batten features a high impact polycarbonate diffuser and body that is IP65 weatherproof. Making this batten ideal for use in carparks, garages, security areas, workshops, factories, industrial environments, stairwells, corridors, storage areas, schools and public amenities. As well as outdoor eaves, patios and pergolas.



- Corrosion resistant IP65 weatherproof polycarbonate body
- Stainless steel tamper proof clips for added security
- Ceiling or suspended mounting
- High impact polycarbonate diffuser
- 20W Tricolour LED light

Tricolour LED	20W 2400 LUMENS	110°-130° Beam Angle	Non Dimmable	IP 65 IP Rating	≥80 CRI	IK08 Vandal Proof


**INCLUDES**

Main body, mounting brackets & screw pack

**DIMENSIONS**

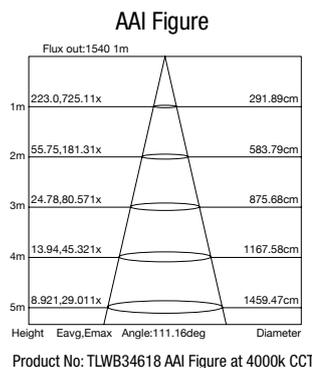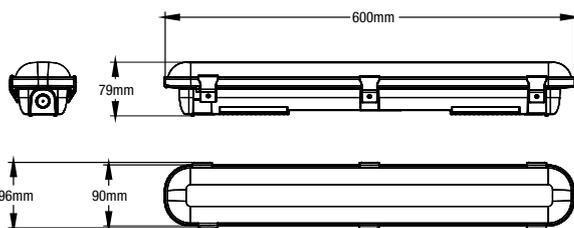

**Luminous Intensity Distribution Diagram**

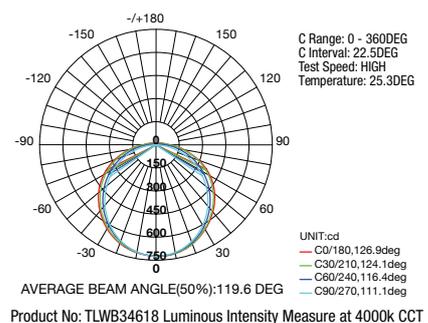

Aust/NZ Approval No.  
EESS-190476-0



9312375506775



TLWB34618

20W TRICOLOUR LED WEATHERPROOF BATTEN LIGHT

## FEATURES

- Corrosion resistant IP65 weatherproof polycarbonate body
- Stainless steel tamper proof clips for added security
- Ceiling or suspended mounting
- High impact polycarbonate diffuser
- Vandal resistant IK08 rated
- Waterproof connectible cable gland and lock nut
- Provides excellent light distribution using Tricolour SMD LED technology
- Select either 3000k, 4000k, or 6500k light colour temperature setting
- 20W Tricolour LED light

## SPECIFICATIONS

<b>Model name</b>	20W Tricolour LED Weatherproof Batten Light 600mm
<b>Model number</b>	TLWB34618
<b>Power (wattage)</b>	20W
<b>Voltage</b>	220v-240v
<b>Frequency</b>	50Hz
<b>Switchable Tricolour lumens</b>	2400lm max
<b>Colour temperature</b>	3000k / 4000k / 6500k
<b>LED light beam angle</b>	110°-130°
<b>Product size (mm)</b>	600 x 96 x 79
<b>Material</b>	High impact polycarbonate diffuser
<b>LED Type</b>	SMD LED
<b>CRI</b>	≥80
<b>Approximate lamp life</b>	30,000hrs
<b>Weather resistance rating</b>	IP65
<b>Operating temperature</b>	-20°C to +40°C
<b>Impact resistance rating</b>	IK08



## INSTALLATION

<b>Installation</b>	By licensed electrician only
<b>Warranty</b>	2 year replacement warranty*

\* For further information regarding warranty terms and conditions, please refer to enclosed warranty statement.

## SHIPPING

<b>Packaging size</b>	605 x 83 x 100mm
<b>Gross weight</b>	6.5kg
<b>Carton qty</b>	6

## AVAILABLE IN LIGHT GREY



 Light Grey

Model	Colour	Barcode
TLWB34618	Light Grey	 9312375506775